


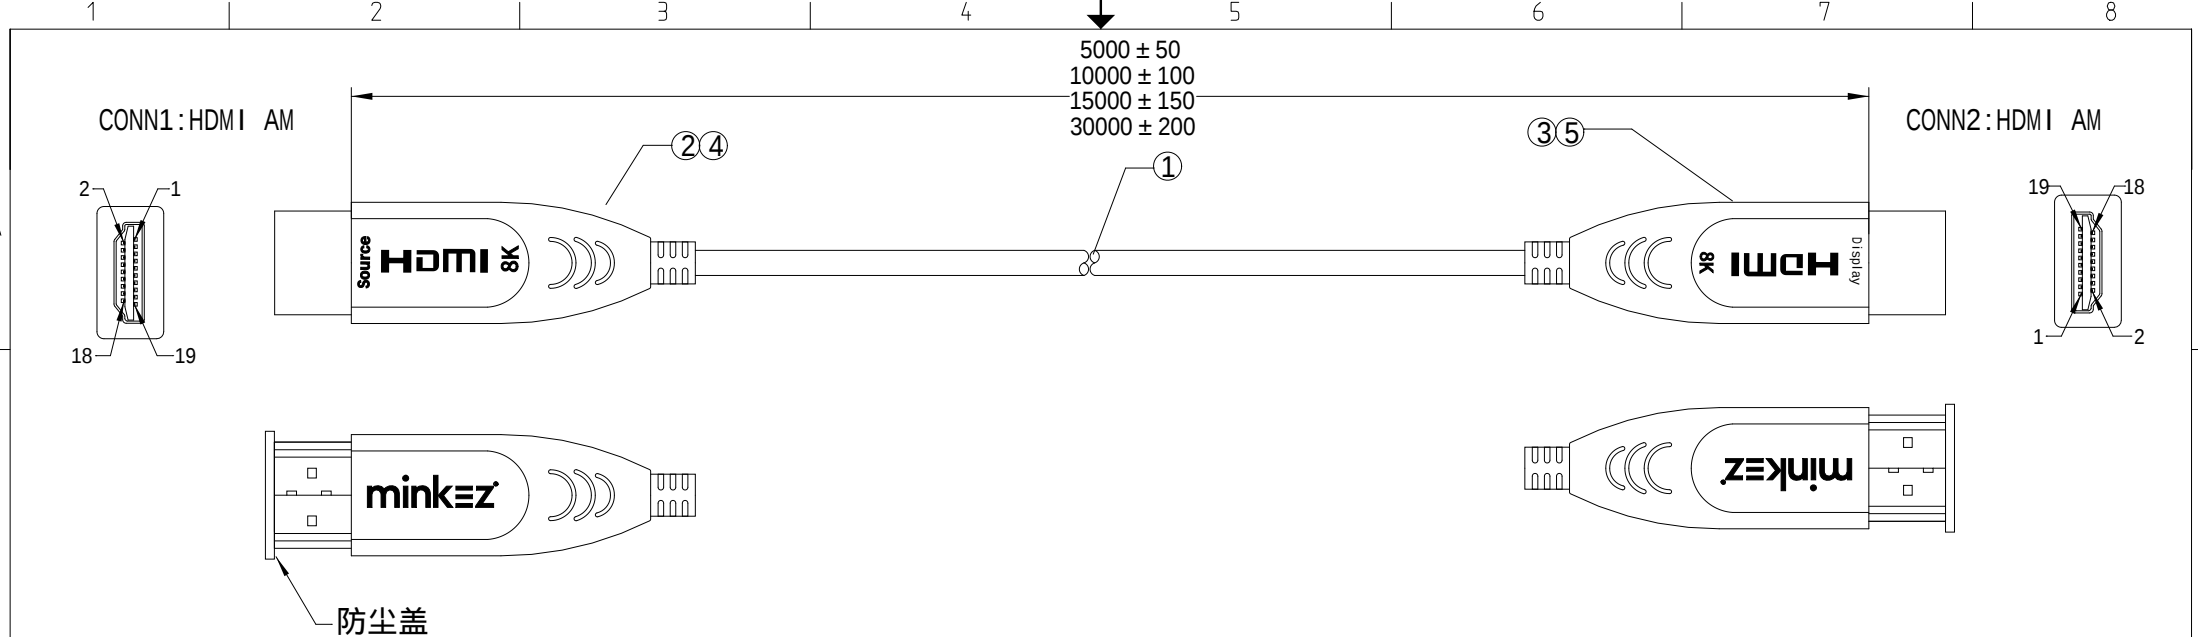

1.Wiring Chart :

CONN1 CONN2

Optical fiber green-----Optical fiber green
Optical fiber blue-----Optical fiber blue
Optical fiber brown-----Optical fiber brown
Optical fiber orange-----Optical fiber orange


HPD-----HPD
SDA-----SDA
SCL-----SCL
+5-----+5
NC-----NC
CEC-----CEC
GEN-----GEN

2. Technical Requirements

The product must pass the 8K/60HZ test with a 48Gbps transmission rate.

ELECTRICAL TEST:
1:100% OPEN & SHORT TEST
2:CONTACT RESISTANCE:5Ω (MAX.)
3:INSULATION RESISTANCE:10MΩ /300VDC/10ms(MIN.)

3. Packaging Illustration

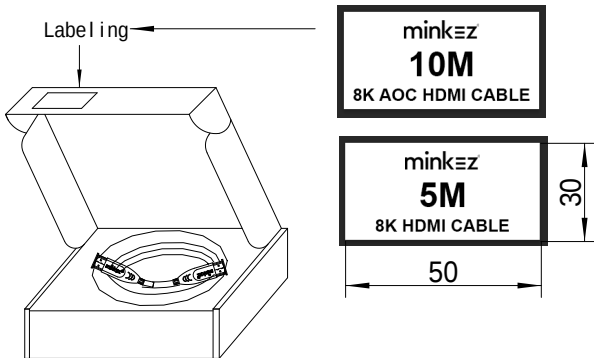

NO.	PART NO.	DESCRIPTION	Q'TY	UNIT
①	CABLE	(30AWG*1P+D+AL)*1+28AWG*4C+24AWG*1C+光纤+F+A OD:4.8	1	PCS
②	CONNECTOR	HDMI 2.1 Optical fiber module RX gold plating	1	SET
③	CONNECTOR	HDMI 2.1 Optical fiber module RX gold plating	1	SET
④	ASSEMBLED CASE	Black zinc alloy housing Display	1	SET
⑤	ASSEMBLED CASE	Black zinc alloy housing Source	1	SET
⑥	OUT MOLDING	45P-PVC Black		G

minkεz®							CUSTOMER APPROVAL :			
CUSTOMER		DATE	26/07/28	UNIT	mm	SCALE	REV	A/O	PAGE	1/1
ITEM NO	DY-C1242-		PART NO	HDMI AM/HDMI AM(光纤)						
DRAWN BY			CHECKED BY			APPROVE BY				