


The materials shown in the figure are consistent RoHS2.0 2015/863Revision instruction

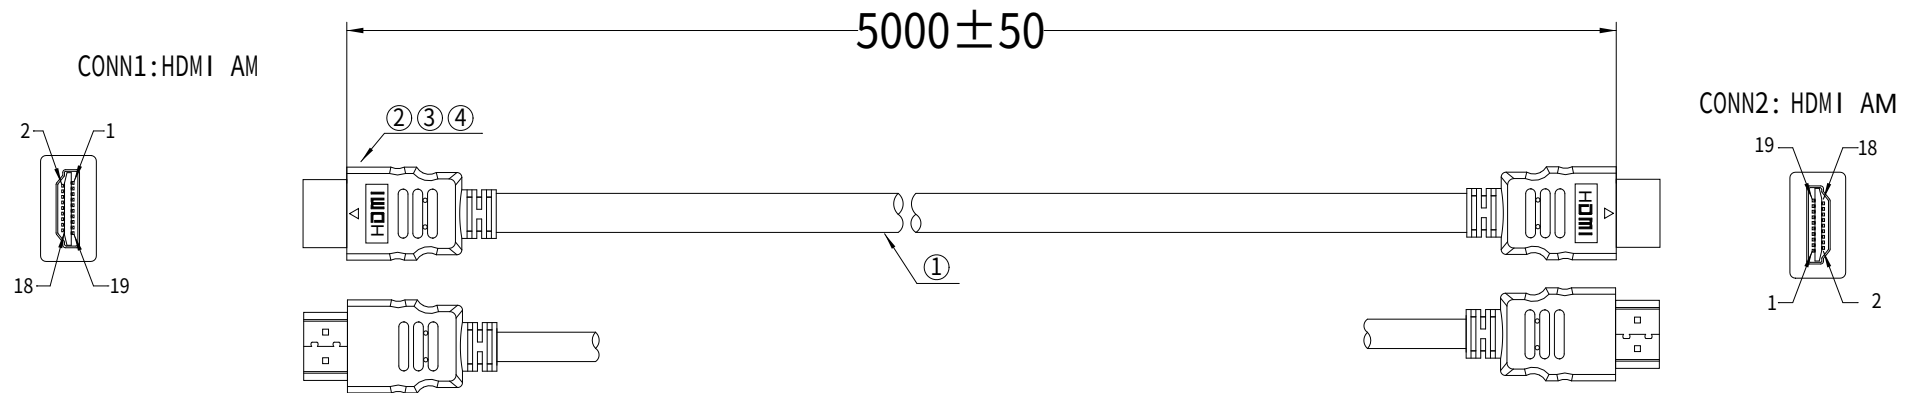


1.Wiring Chart :

CONN1	CONN2
1	1 red
3	3 white
5	5 drain
4	4 blue
6	6 white
2	2 drain
7	7 green
9	9 white
11	11 drain



CONN1	CONN2
10	10 brown
12	12 white
8	8 drain
14	14 yellow
19	19 orange
17	17 pink
13	13 Grey
15	15 white
16	16 purple
18	18 red
SHELL-----SHELL BRAID	

3. Packaging Illustration

Cardboard sticker:



Sticker box sealing



Single looped string, after being bagged, is placed in a white neutral paper box.

2. Technical Requirements:

- 2.1 The plugs at both ends are made of black PVC material;
- 2.2 All materials must comply with the ROHS 2.0 standard;
- 2.3 The product should support functions such as 48Gbps, 8K/60HZ, etc.

NO.	PART NO.	DESCRIPTION	Q'TY	UNIT
①	CABLE	HDMI cable 19C + D + AL with a diameter of 7.3 mm, black. 28#[(7/0.127TC $\pm$ 0.10FMP $\times$ 1P)+D(7/0.127TC)+AM]*4C+28AWG(7/0.127TC $\pm$ 0.7HDPE)*1P+28AWG(7/0.127TC $\pm$ 0.7HDPE)*5C+AD(7/0.12BC)B(16*8/0.12AM)	1	PCS
②	CONNECTOR	HDMI AM PIN is gold-plated. Black vinyl core with 28# wire clamp (with tail). Iron case is nickel-plated. ROHS compliant.	2	PCS
③	INSIDE MOLDING	PE WHITE Inside mould ROHS 2.0	8	G
④	OUT MOLDING	45P-PVC Black ROHS 2.0	24	G
⑤	CARTON	460*300*300MM		箱

mink$\equiv$z								CUSTOMER APPROVAL:	
CUSTOMER		DATE	26/08/06	UNIT	mm	SCALE		REV	A/0
ITEM NO	DY-C1240	PART NO	HDMI AM/HDMI AM						
DRAWN BY		CHECKED BY		APPROVE BY		PAGE 1/1			