

The Combination of Audio Mixer, Loudspeaker and Power Amplifier

Companion 118



AV ELECTRONICS MARKETING SDN BHD

www.iva.com.my

AUDIO MIXER, LOUDSPEAKER AND POWER AMPLIFIER COMBINED!

When it comes to setting up a portable sound system, traditionally, you'd need to configure multiple components, including an audio mixer, a power amplifier, and a loudspeaker. This process can be both time-consuming and costly. However, the IVA **Companion 118** offers an elegant solution to simplify your setup and save you money. It's an all-in-one portable speaker system that combines all these crucial elements into a single, compact package.



FEATURES



Small, compact & lightweight portable all-in-one loudspeaker

High power 150 Watt with high SPL of 118 dB





Superb bass response which frequency response as low as 52 Hz

Battery powered which last up to 20 hours of usage





Built-in reverb effect for karaoke and singing performance

Built-in Feedback Suppressor to reduce annoying feedback frequencies






Multi-angle deployment for various mounting applications

118dB IN A COMPACT FRAME

Don't be fooled by its size, though, as its audio quality and sound pressure level deliver jaw-dropping performance. With the max Sound Pressure Level (SPL) of 118 decibel, the IVA Companion 118 is truly remarkable and lives up to the "listen to believe" moniker, showcasing its unbeatable sound quality and features.

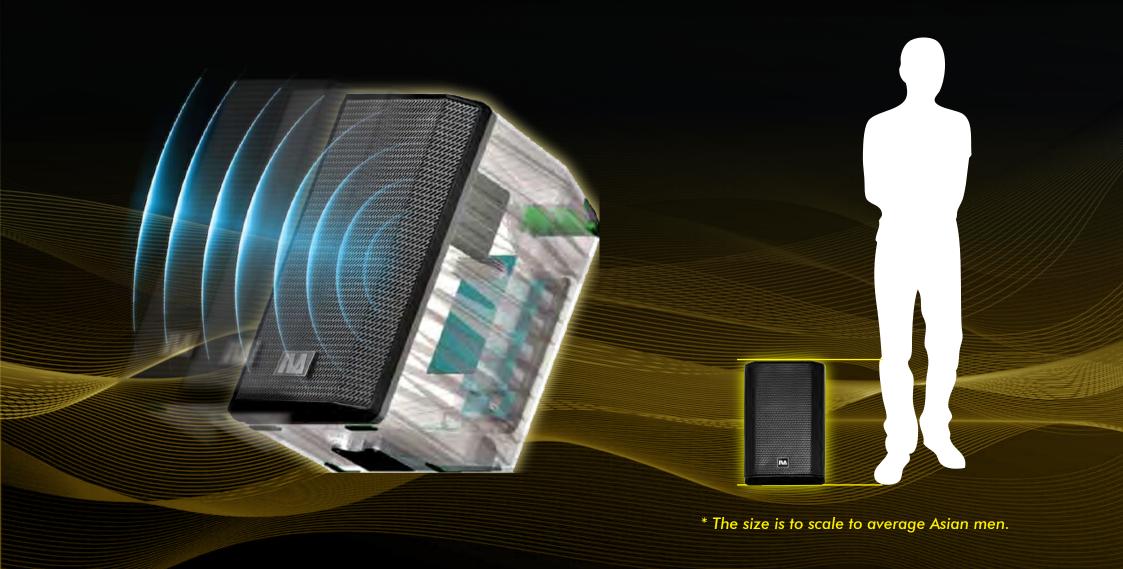

SOUND FREEDOM WITH LONG-LASTING BATTERY

What truly sets the IVA Companion 118 apart is its built-in battery pack. This feature grants you the freedom to use the sound system without being tethered to a power outlet. Whether you're hosting an outdoor event, a mobile DJ gig, or simply enjoying music on the go, the Companion 118's built-in battery ensures that you can take your sound wherever you please, without limitations. What's more impressive is that the Companion 118 can last up to 20 hours of playback and can be fully charged in 3 hours' time.









FLEXIBILITY IN SOUND DEPLOYMENT

The ingenious multi-angle positioning of this portable loudspeaker provides users with the utmost flexibility in its deployment. Among the most fundamental methods for positioning a loudspeaker is placing it on the floor. However, the adjustable angling feature in the Companion 118 allows you to tilt the portable speaker upwards, redirecting the audio output towards the audience, whether they are standing or sitting. This is particularly beneficial since listeners' ears are typically positioned at a height above the ground, not at floor level.







Floor Deployment

Monitor Configuration

Speaker Stand Mount

YOUR LIGHTWEIGHT SOUND COMPANION

Weighing in at a mere fraction of traditional sound systems, the Companion 118 is an ideal choice for individuals on the go. Whether you're a mobile DJ, musicians, buskers, a presenter at different venues, or simply someone who loves to enjoy high-quality audio in different locations, the Companion 118's lightweight build ensures that you won't be burdened by heavy equipment during transportation. The compactness of the Companion 118 means that it can be effortlessly stowed in the trunk of a car, in a small storage space, or even carried by hand without the need for additional assistance. This makes it a versatile solution for those who frequently need to move their sound system from one location to another.



GOODBYE TO ANNOYING FEEDBACK

When the audio system reaches high volume levels, it can become challenging as the reproduced sound loops back into the system, resulting in a disruptive screeching known as feedback. The Companion 118 portable speaker includes a feedback suppressor to effectively eliminate this bothersome issue. By mitigating this problem, the system's performance is significantly enhanced, allowing singers and users to enjoy the system to its fullest with contented hearts.



SPECIFICATIONS

Model	Companion 118
Description	Battery Powered Portable Speaker System
Transducer Low	1 x 8" Woofer
Transducer High	1" Voice Coil
Horn Coverage	100° H x 60° V
Frequency Response (-3 dB)	52Hz-20khz
Max SPL	118 dB
Power rating	150 Watt
Inputs	3 x XLR combo jack, 2 x RCA, 1 x Bluetooth, 1 x 3.5mm jack
Outputs	1 x XLR, USB Power Output
Effect	Reverb in 2 Channels
Special feature	Feedback Suppressor, Bluetooth Audio Playback
Battery Spec	6100 mAh, 14.8 V
Battery Life	8 - 20 hours of playtime depending of loudness played
Charging Time	3 hours to fully charged
DSP	Yes, built-in
Enclosure Material	Polypropylene
Mounting Options	Pole Mount, Floor Wedge
Dimensions (WDH)	251 x 296 x 392 mm
Weight	6.75 kg