


**Highlights**



USB Thumbdrive Player and Recorder

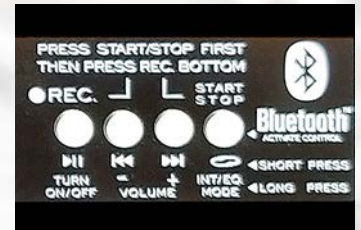

Bluetooth Playback



Studio Grade Effect Engine


**Bluetooth Connectivity**

*( For Smartphone Playback )*



**Features:**

- 2 Mono Inputs Channels with silver plated XLRs and balanced Line Inputs
- 1 Stereo Input Channel with silver plated jack inputs
- Ultra-low noise Studio grade Mic Preamps with + 48 V Phantom Power
- Ultra-musical 3 band EQ on all channels
- Peak LEDs all Mono and Stereo Channels
- Single Studio Grade Effect Engine
- 1 Aux Send & FX Send per channel for external processing and outputs
- Highly accurate 5 segment Bargraph Meters
- 1 Stereo Master Mixer output, 1 RCA Output
- Studio Grade Playback+Recording USB Thumbdrive
- Bluetooth Connectivity for Smartphone playback

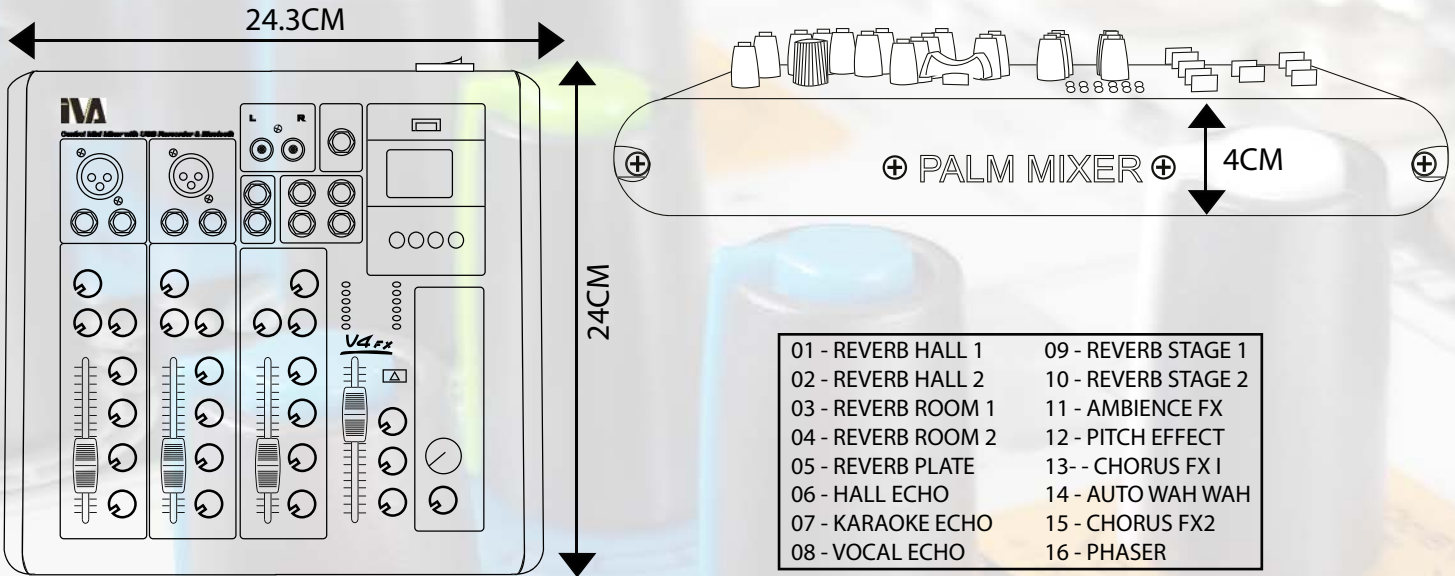

## Specifications

Mono Inputs	
Mic Inputs	2 Electronically balanced discrete input configuration
Bandwidth	10 Hz to 60 kHz +/- 3 dB
Distortion (THD & N)	0.01 % at +4 dBu, 1 kHz, bandwidth 8- kHz
Mic E.I.N (22 Hz – 22 kHz)	- 122 dBqp, input shorted - 129.5 dBu, 150 Ohm source
TRIM range	- 45dB to + 4dB
Line Input	
Bandwidth	10 Hz to 60 kHz +/- 3 dB
Distortion (THD & N)	0.01 % at +4 dBu, 1 kHz, bandwidth 8- kHz
Line Level Range	- 45dB to + 4dB
MP3/Bluetooth Level Range	- 45dB to + 4dB
Equalization	
Hi	12 kHz +/- 15 dB
Mid	2.5 kHz +/- 15 dB
Low	80 Hz +/- 15 dB
Master Mix Section	
Max Output	+22 dBu
Aux Send Max Out	+22 dBu
Signal-to-Noise Ratio	112 dB, all channels at Unity Gain
Power Supply	
Main Voltages	U.K / Australia / Malaysia ~ 240 V AC, 50 Hz
Weight	
Net Weight	2Kg
Gross Weight	3.5Kg

. The manufacturer reserves the right to make changes or improvements in manufacturing or design which may affect specifications.

# V4FX Mixer



Top View



Top Side View



Side View



Rear View